


# ROTEX LITE

## User friendly :

- \* Complete lateral clearance of the plate
- \* Automatic opening by electromagnet
- \* Reversible C-shaped part & Quick Release
- Optimal heat & pressure distribution
- Robust frame
- Suitable for laser transfer applications & sublimation on textile and rigid materials
- Ideal for small to medium productions
- Manufactured in France
- 1-year guarantee on the machine
- 10-year guarantee on heating plate

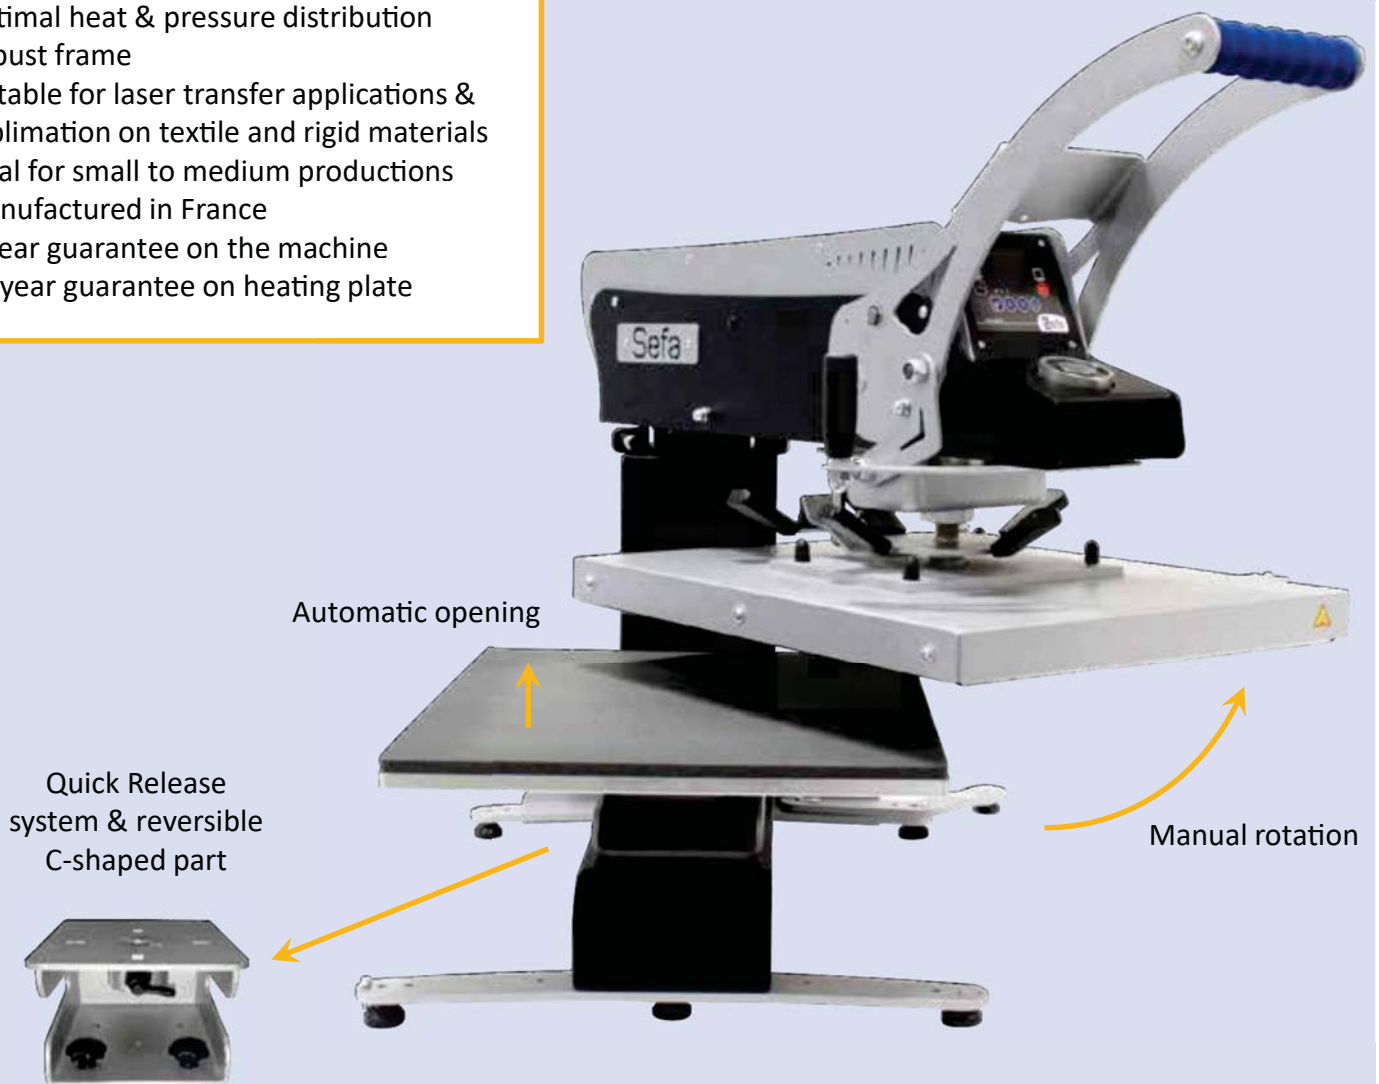


## Accessories



Support table



Set of plates



Nomex® cover



Laser pointer

## Technical characteristics

Plates size	40 x 50 cm
Weight	81 Kg
Maximal pressure	590 gr/cm <sup>2</sup>
Max temperature	220°C
Power supply	240 V
Electric power	2500 W
Amperage	11 A

## Settings



*Electronics developed by Sefa.*

Accurate and fast regulation (PID control) for a wide range of heat transfer products : Flex, flock, sublimation, screen printing transfer.



### Advanced electronics

Double timer (main + pre-heat)  
2 cycle counters,  
3 settable programs  
Stop cycle function

From 0 to 570 sec (precision +/- 1%).  
From 0 to 220°C (precision +/- 1%).  
Heating time to reach 180°C : 15 min.

## Accessories




### Table TAB-98 PRO

Strong support table for SEFA heat presses. Available with Castors.



### Set of 4 plates PLA-QR:

Useful for precise work.  
Dimensions:  
12 x 8 cm - 15 x 15 cm  
12 x 45 cm - 25 x 30 cm



### Nomex® cover HOU-50 :

Heat resistant NOMEX® cover to protect the lower plate and make the threading easier.



### Laser pointer CROI-161:

1-laser system to position your transfers with a greater precision. Possibility to add a second laser on the ramp.

## Dimensions

