



JF-240UV

Flatbed Printer

265019160G(01)

Printing method	On-demand Piezo head	
Print head (Drop size)	UV printing dedicated printhead, 4 pl	
Printing area (W x L)	24 x 20 in. (609.6 x 508 mm)	
Max. media area (W x L x H)	Size	25.6 x 21.7 x 11.8 in. (650 x 550 x 300 mm)
	Weight	Less than 15 kg
Media height adjustment	AMC™	
Speed	Production: 5.78 m ² /hr	
	Quality: 3.90 m ² /hr	
	Hi-density: 1.91 m ² /hr	
Ink	Type	UV curable ink
	Capacity	1 liter
	Colors	C/M/Y/K + W/V (optional)
Ink curing unit	Dual UV LED lamps	
Printing resolutions	1440 x 720 dpi ~ 1440 x 1440 dpi	
Distance Accuracy – When printing	Error of less than +/- 0.3 % of distance traveled, or +/- 0.3 mm (0.01 in.), whichever is greater	
Z axis movement	Motorized	
Control Panel	Touch Screen	
Interface	Ethernet 1000BASE-T	
Operating Environment (Temperature/Humidity)	22 °C - 30 °C (71.6 °F - 86 °F) / (40 % - 60 % humidity), higher is recommended	
Operating Voltage	110 - 240V AC, 50/60 HZ	
Power consumption – Operating	115V AC (60 HZ) (Max. 270 W), 220V AC (50 HZ) (Max. 260 W)	
Power consumption – Stand by	115V AC (60 HZ) (Max. 160 W), 220V AC (50 HZ) (Max. 200 W)	
Dimension (WxLxH)	2000 x 1300 x 1360 mm	
	78.7 x 51.2 x 53.5 in.	
Weight	300 Kg	
Optional	Rotary attachment, Roll to Roll system, Fume Extraction Unit	

JF-240UV Flatbed Printer

Optional



Industrial-grade UV printer offers astonishing print quality with surpassing throughput

11.8" Media Thickness

Dual-UV LED

ADA & Tactile



* Above specifications are subject to change without prior notice.



г. Минск, л. Жуковского, 11а, офіс 23
 Тел./факс: + 375 17 227-01-00
 Моб. MTS: + 375 29 777-71-22
 E-mail: info@delinit.by
 Http:// www.delinit.by

- ♦ 24"x20" Flatbed UV Printer
- ♦ Max. of 11.8" media thickness
- ♦ Dual UV LED Lamps
- ♦ 1 liter bulk ink system

- ♦ Printhead Gap Auto-Adjustment
- ♦ Auto Media Calibration (AMC™)
- ♦ Excellence in ADA and 3D tactile printing
- ♦ Roll to Roll system / Rotary Attachment (optional item)




The innovative GCC Flatbed UV Printer, JF-240UV, comes with high throughput, standard dual-UV LED lamps, 1 liter bulk ink, four colors CMYK and optional Varnish and White color that offer outstanding printing quality for industrial market. With applicable to a maximum of 30cm tall object and superior print area, GCC JF-240UV Flatbed Printer eliminates the limitation of printing.

Application


Color Varnish (Patented)

Color varnish function is an excellent helper of color customization and fully exhibits the promoting effects, which offers added value on products and presents eye-catching printing quality.

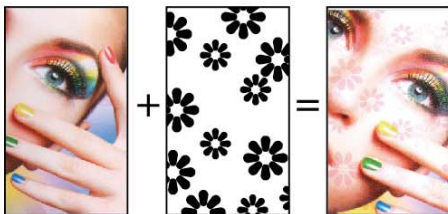

Dedicated White Solution


Four white ink printing modes fulfill the majority of applications and deliver vibrant colors on commonly used material as well as dark and transparent media.

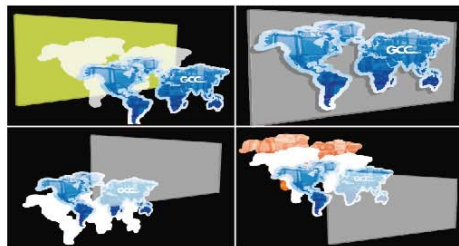

Feature


SmartMESH™

The advanced SmartMESH™ technology is to produce smooth tonal gradation and exceptional color gamut by applying complex algorithm to ink jetting patterns control. It effectively solves the banding issues and greatly increases image quality.

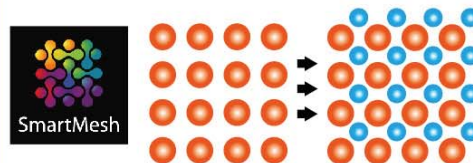


Printhead Gap Auto-adjustment

Printhead Gap Auto-detection can lower the platform automatically when detecting obstacles blocking the movement of printhead before printing to avoid printhead loss.

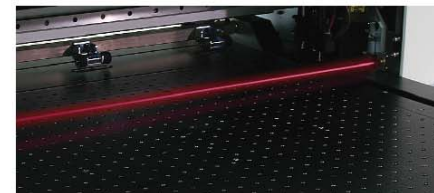

Auto Media Calibration (AMC™)

The gauges the distance between the print heads and loaded media can be automatically detected and adjusted to the optimized position based on the thickness of the loaded media.

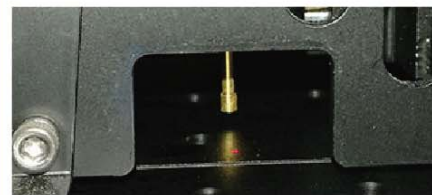

Motorized Z Axis Adjustment

Motorized z-axis positioning table provides an easy and precise platform height adjustment by one touch for load elevation.

