GRAPHTEC

Cutting Plotter CE7000-40 / CE7000-60 / CE7000-130 / CE7000-160

NEW



Enhanced basic specification and excellent cost-effectiveness

Supporting a cutting force of 4.41N (450gf) expands application possibilities.

Ease of use with great media tracking on long runs.

ARMS8.0 helps improve the productivity of print and cut.

Improved workflow with offline output using USB memory and data management function using Barcode.

Useful standard or optional software helps improve the efficiency of cutting operation.

* The basket in photo above is optional item

Graphtec cutting plotters never stop evolving.

The cutting plotter CE7000 series has great efficiency as high as high-end model with high cost-effectiveness. Support improve work efficiency and productivity with enhanced specifications and standard software specialized for cutting operation.






C

C

Minimum mountable media width is 50mm (1.96 inch). Maximum mountable media width depends on each machine; 484mm(19 inch), 712mm(28 inch), 1372mm(54 inch) and 1626mm(64 inch).

	Media
E7000-160	← 1626mm
E7000-130	←1372mm ───
CE7000-60	← 712mm →
CE7000-40	← 484mm →

Supports various cutting patterns such as perforation cut with maximum cutting force 4.41N (450gf) and maximum cutting speed 1000mm/s (* 1).

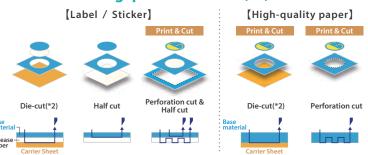

By reading the Graphtec original Barcode, CE7000 automatically detects its linked data from PC or USB flash memory. This function is


* The USB memory format only supports FAT32. Please note that NTFS and exFAT are not supported.

available regardless of which printer or RIP software is used.

[Carrier Sheet Table]

It is an optional item that can be attached to the front and back of the cutting plotter to support a carrier sheet.

* Available with CE7000-40 / -60.



Cutting performance that guaranties accurate 5m length cutting. (*3)

The media stocker helps stabilize the feeding of media. By adjusting the pressure of the middle push roller to the media (* 1) in three levels, it prevent media floating.

Soccer

In addition, by using an optional special basket, stability in long cuts can be achieved.







Optional basket (CE7000-60/130/160)

Push roller pressure switching (CE7000-130/160)

Data output via USB flash memory without PC

The cutting data designed with Cutting Master 4 or Graphtec Pro Studio / Plus can be output directly to the cutting plotter by saving to USB flash memory and plugging in. This simplified work-flow enables users to operate without a computer.

* The USB memory format only supports FAT32. Please note that NTFS and exFAT are not supported.




ARMS 8.0

The Advanced Registration Mark Sensing system delivers precise Print & Cut results by using sensors to detect registration mark Countless efficiency boosting features improve productivity for Print & Cut applications such as stickers and decals. For more inf

Data Link Function (Barcode Data Management/Continuous Cutting) Continuous Cut (Data Link function)

Barcode data management allows cutting different data sequentially by detecting the "Start Mark" of the new Barcode. Sequential Print & Cut process with roll-media is now available.

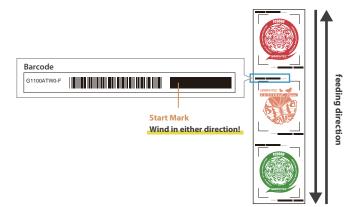

Print out design with original Barcode attached

Barcod









Adobe Illustrator / CorelDRAW plug-in software Cutting Master 4 Standard Accessory




Cutting Master 4 is Graphtec plug-in software for Adobe Illustrator and CorelDRAW Graphic Suite. It sends cutting data to the plotter and includes a variety of functions such as: preview, registration mark creation, tool conditions, cut job settings and more. Cutting Master 4 is easy to use and enables you to get the best performance from your plotter. Trim marks for Adobe Illustrator is finally available.

Supported OS (*4)	Windows 10/8.1/7, Mac OS X 10.7~macOS 10.15		
Supported software (*4)	Adobe Illustrator : CC2019/CC2018/CC2017/CC2015.3/CC2015/CC2014/CC/CS6/CS5/CS4 CoreIDRAW : Graphics Suite 2019/2018/2017/X8/X7/X6/X5/X4		
<main features=""></main>			

- nd, shrink the object directly from the pre
- Create object outline, recognize the line width and overlap
 Output by layer or color
 Insert weeding line
- Split an object into small pieces with tilling function Connectable and switchable to multiple plotters

Graphic design software Graphtec Pro Studio Standard Accessory **Graphtec Studio**



Easy-to-use application software for creating original designs. It has many enhanced functions such as auto-shapes, shading, and editing functions. It can also configure the cutting conditions and other setting on plotter. EPS, Ai(*6), CMX(*6), and PDF(*6) file formats are supported. Graphics created with other popular design software can be imported into the software.

	Supported	Graphtec Pro Studio	Windows10/8.1/7	
so	software (*4)	Graphtec Studio	Mac OS X 10.6~macOS 10.15	
<main features=""></main>				

- Create designs using auto-shape, various line types, etc.
- Texts edit (rotate, mirror, fit-to-shape, etc.)
 Auto-trace (supporting bmp, tiff, jpeg, gif, etc. image format)
- Connectable and switchable to multiple plotters
 EPS, DXF format files and other raster format files are supported

● Laver (*6) ● Output by color ● Insert weeding line (*6)

Advanced Graphic Design Software

Graphtec Pro Studio Plus Option Optional Software Craphtec Pro Studio Plus for Rhinestone Graphtec Pro Studio Plus for Auto Nesting -----



Graphtec Pro Studio Plus is the enhanced edition of Graphtec Pro Studio. It is optional software with functions for improving productivity and advanced design. Additional functions include transformation of characters and graphics, automatic sequence number insertion, bar-code creation, templates for rhinestone creation, nesting, directional change of cutting lines, changing cutting order, and more.

Supported OS (*4) Windows 10/8.1/7

<Main Features of Graphtec Pro Studio Plus>

Text and shape deformation, shadow / stripe effects Spelling check

Vector

 Filter for bitmap image
 Power Nest (Nesting)

 Serialized numbering, Barcode, QR code, etc.
 Cutting simulation

(Changing cutting order)
Output by layer or color
Insert weeding line

 Rhinestone design support <Main Features of Graphtec Pro Studio Plus for Rhinestone>

- Rhinestone design support

<Main Features of Graphtec Pro Studio Plus for Auto Nesting>

Nesting (Auto, Power Nest, intelligent)

s and perform axis alignment.

Supports colored marks / specialty media

Ex.

A wide variety of media types including holographic paper and reflective sheets are now compatible due to improvements of the ARMS sensor algorithm.

* Sensor may not be able to read certain combinations of specialty media and colored marks.



Expanded Cutting Area

The expanded cutting area to include objects outside of the area enclosed by registration marks. Production efficiency is enhanced by reducing media waste.

Supports Adobe Illustrator "Crop Marks"

Using the plug-in software Cutting Master 4, Adobe Illustrator crop marks will be available.



- 2 Using carrier sneeds say.
 3 In case that using optional baskets of CE7000-60/130/160 and cutting media and conditions specified by our company.
 4 For more information about compatibility of the latest OS or application software, please check the Graphtec website or contact your local representative of Graphtec
 *5 CS4 is supported with Windows only.

Specifications							
ltem		CE7000-40	CE7000-60	CE7000-130	CE7000-160 (Not available in US & Korea		
Configuration		Grit rolling type			· ·		
Drive method		Digital servo drive					
Max. cutting area (W x L) (*1)		375mm × 50m	603mm × 50m	1270mm × 50m	1524mm × 50m		
Cutting area of guaranteed a	accuracy (*1)	355mm×2m	583mm × 2m	1250mm × 2m	1504mm × 2m		
(When using optional bas	sket)		(583mm × 5m)	(1250mm × 5m)	(1504mm × 5m)		
Mountable Min	n.	50mm					
media width Ma	ax.	484mm (19inch)	712mm (28inch)	1372mm (54inch)	1626mm (64inch)		
Mountable roll media ma	ISS	5kg	9kg	17kg	20kg		
Number of push rollers		2 rollers 4 rollers (Max. 5 (option))					
Max. cutting speed		600mm/s at all direction 900mm/s at 45° direction 1000mm/s at 45° direction					
Acceleration		Max. 21.2m/s ² at 45° direction Max. 13.9m/s ² at 45° direction					
Cutting force		Max. 4.41N (450gf)					
Minimum character size		Approx. 5 mm alphanumeric (varies	depending on character font and m	iedia)			
Mechanical resolution		0.005mm					
Programmable resolution	า	GP-GL: 0.1/0.05/0.025/0.01mm	HP-GL™ (*2):0.025mm				
Repeatability (*1) Max. 0.1 mm in plot up to 2 m (Excluding media expansion and contraction)							
Mountable number of too	ols	1 tool	<u> </u>	· · · ·			
Blade types Supersteel							
Pen types Oil-based ballpoint pen, Water-based fiber-tip pen							
Media types		Up to 0.25mm thickness					
Marking film (PVC / fluorescence / reflection), polyester film (With specified conditions)			fied conditions)				
Interface			2.0(Full Speed), Ethernet 10BASE-T/100BASE-TX				
Buffer memory 2MB							
Command sets		GP-GL / HP-GL [™] (Set by command or auto-detect) (*2)					
Display		Graphic type LCD with back-light (240dots x 128dots), supports 10 languages					
Power source							
Power consumption		Up to 100W					
Operating environment		10 to 35 °C, 35 to 75 % R.H. (non-co	ndensing)				
Guaranteed accuracy env	/ironment	16 to 32 °C, 35 to 70 % R.H. (non-co	ndensing)				
External dimensions (W x	DxH)	Approx. 772 x 292 x 313 mm	Approx. 1005 × 582 × 1092 mm	Approx. 1704 × 811 × 1215 mm	Approx. 1916 × 811 × 1215 mm		
(with basket)			$(1005 \times 936 \times 1092 \text{ mm})(*3)$	$(1704 \times 1148 \times 1215 \text{ mm})(*3)$	$(1916 \times 1148 \times 1215 \text{ mm})(*3)$		
Weight (approx.)		13 kg	23 kg	51 kg	55 kg		
(with basket)		-	(25.2 kg)(*3)	(54.9 kg)(*3)	(59.5 kg)(*3)		
Compatible OS (*4)		Windows 10/8.1/7					
		Mac OS X 10.6 ~ 10.11 / macOS 10.12 ~ 10.15 (Graphtec Studio: 10.6 - 10.15, Cutting Master 4: 10.7 - 10.15)					
Supported software (*5)		Graphtec Pro Studio(Windows)(*6), Graphtec Studio(Mac), Cutting Master 4(*6), Windows Driver					
Safety							
EMC							
		· · · ·					
Option				Standard accessories			

Part No.	Description	
PG0103	For CE7000-60	I
PG0104	For CE7000-130	I
PG0105	For CE7000-160	(
OPH-A45	For CE7000-40 or CE7000-60	(
OPH-A49	Only for CE7000-130/CE7000-160	I
ST0118	For CE7000-60	I
OPS682-PLS	Design software including all advanced functions (1 license)	١
OPS682-RSF	Limited edition of rhinestone function only (1 license)	I
OPS682-ANF	Limited edition of auto nesting function only (1 license)	•
	PG0103 PG0104 PG0105 OPH-A45 OPH-A49 ST0118 OPS682-PLS OPS682-RSF	PG0103 For CE7000-60 PG0104 For CE7000-130 PG0105 For CE7000-160 OPH-A45 For CE7000-40 or CE7000-60 OPH-A49 Only for CE7000-130/CE7000-160 ST0118 For CE7000-60 OPS682-PLS Design software including all advanced functions (1 license) OPS682-RSF Limited edition of rhinestone function only (1 license)

Supplies			
ltem	Part No.	Description	Package
Cutting blade holder PHP33-CB09N PHP33-CB15N		For CB09U series blade	1 set/pack
		For CB15U series blade	1 set/pack
Cutting blade CB09-P		0.9mm dia. 45º angle, Supersteel	5 blades/pack
	CB09UB-5	0.9mm dia. 45º angle, Supersteel	5 blades/pack
	CB09UB-K60-5	0.9mm dia. 60° angle, for Car-film	5 blades/pack
	CB15U-5	1.5mm dia. 45° angle, for paper/cardboard	5 blades/pack
	CB15U-K30-5	1.5mm dia. 30° angle, for paper/cardboard	5 blades/pack
Loupe	PM-CT-001	Checking blade length, for PHP33 and PHP35 series	1 set/pack
Fiber-tip pen holder	PHP31-FIBER	Pen holder for KF700 series pen	1 set/pack
Water-based	KF700-BK	Pen (black)	10 pens/pack
fiber-tip pen	KF700-RD	Pen (red)	10 pens/pack
Ballpoint pen holder	PHP34-BALL	Pen holder for KB700 pen	1 set/pack
Oil-based ballpoint pen	KB700-BK	Pen (black)	10 pens/pack
Carrier Sheet	CR09300-A3	A3 size	2 sheets/pack
Cutting mat	PM-CR-009	For CE7000-40 replacement cutting mat	2 sets/pack
PM-CR-010 For CE7000-60 replacement cuttin		For CE7000-60 replacement cutting mat	2 sets/pack
	PM-CR-011	For CE7000-130 replacement cutting mat	2 sets/pack
	PM-CR-012	For CE7000-160 replacement cutting mat	2 sets/pack

Ctow dowd a second with a				
Standard accessories				
ltem	Qty	Description		
Power cord	1	The type of cord is different by destination.		
USB Cable	1	2.9m long		
Cutting blade holder	1	PHP33-CB09N-HS		
Cutting Blade	1	CB09UB-1P		
Loupe	1	PM-CT-001		
Fiber-tip pen holder	1	PHP31-FIBER		
Water-based Fiber-tip pen	1	KF700-BK (black)		
Roll Media Tray	1	Only for CE7000-40		
Stand for CE7000	1	Standard accessory for 130 / 160		
DVD-ROM	1	User manual, Windows driver,		
		Graphtec Pro Studio (Windows, 1 license),		
		Graphtec Studio (Mac), Cutting Master4		
Printed document	1	Setup Manual, Cutter Blade Manual		
		and Safety Manual		

CE7000-160 is not available in US & Korea. *

Operated with Graphtec specified cutting condition and media. For long-length cutting, the basket is used. *1

*2

HP-GL[™] is a registered trademark of Hewlett-Packard Company. When equipped with the stand.

*3 *4

Graphtec does not support software/driver used with operating systems that have become obsolete and are no longer supported by the OS developer. The software can be used by downloading from Graphtec website. It requires an Internet connection in order for activation or registration when the time the operation for the time. *5

*6 when starting the software for the first time.

Brand names and product names listed in this brochure are the trademarks or registered trademarks of their respective owners.
 Items mentioned are subject to change without notice. For more information about product, please check the web site or contact your local representative.

Before using it, please read the user manual and then please use it properly in accordance with the description.
To avoid malfunction or electric shock, please ensure ground connection and use it in specified power source. 🕂 Important safety instructions



Тел.\факс: + 375 17 227-01-00 Моб. МТS: + 375 29 777-71-22 E-mail: info@delinit.by Http:// www.delinit.by

RoHS compliant product CE7000_JE10551_1P